


# CX-1000/75

## MiniMinder Time Delay

### INSTALLATION INSTRUCTIONS

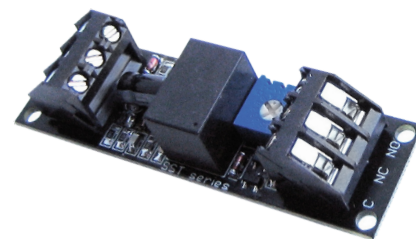

#### 1. FEATURES

- Adjustable delay from 1-120 seconds (Potentiometer)
- Turn clock-wise to increase time; counter clock-wise to decrease time
- Relay: SPDT 3 amp at 24 VDC
- Operating Voltage: 12/24 VDC
- Current: Idle 10mA, Operation 40mA
- Mounting: Supplied with double-sided foam tape

#### 2. DESCRIPTION


Camden's CX-1000/75 is a flexible and easy to operate 'delay on release' circuit board timer. The delay time is adjustable from 1 to 15 seconds via a simple potentiometer.

#### 3. SPECIFICATIONS


<b>Input Voltage</b>	12-24V DC	
<b>Consumption</b>	Idle	1mA @ 12 VDC, 3mA @ 24 VDC
	In Operation	18mA @ 12 VDC, 20mA @ 24 VDC
<b>Relay Output</b>	SPDT, 1 amp. @ 30 VDC contact	
<b>Set Time</b>	Adjustable from 1 to 120 seconds	
<b>Indicators</b>	LED	
<b>Accuracy</b>	+/- 2%	
<b>Mounting</b>	Double-sided foam tape	
<b>Dimension</b>	3/4" W x 2-11/16" L x 13/16" H (19mm x 68mm x 21mm)	

#### 4. APPLICATIONS

**Fail Secure Application**  
Normally de-energized

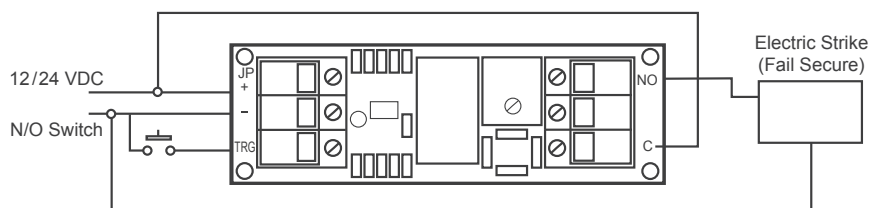

**Fail Safe Application**  
Normally energized

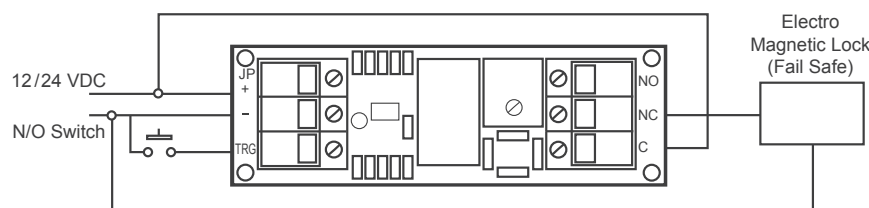

**Drilling Template**

